

# VNG

## Stationary, Natural Gas-Heated, Hot Water Pressure Washer with Multiple-Gun Option

- Up to 10 GPM;  
Up to 3000 PSI
- Belt-Driven Pump with  
7-year Warranty
- Auto Time Delay Shutdown
- Electronic Ignition
- Remote Options



**LANCOM  
WIRELESS  
REMOTE  
OPTION**

■ Extra-durable **Heating Coil** made of leak-free, cold-rolled, Schedule 80 steel pipe with five-year warranty.

■ Rugged **Steel Cabinet**, with vented panels, is painted with an epoxy powder coat finish for all-weather protection.

■ Optional **LanCom Wireless Remote** controls pump, burner and detergent from up to 300 ft. away.

■ Helpful **Tri-Lingual Labels** with operating instructions in English, Spanish and French for owner and operator protection.

■ Insulated, fatigue-free **Trigger Gun** with stainless steel, dual-lance **Variable Pressure Wand** make for easy cleaning and adjusting the pressure while washing.



VNG4-30024A with Optional LanCom Wireless Remote



▲ Industrial-strength **Motor** and cast-iron, bushing **Pulleys** use a convenient 2-bolt pulley adjustment for easy maintenance and longer life; notched, heat-reducing, "V" cogged belts connect the motor to the rugged **High-Pressure Pump** with three ceramic plungers, a forged brass head and a unique design that results in lower RPM than comparable pumps for less maintenance and a longer life. The pump also is backed by a 7-year warranty.

■ Brass, anti-syphon **Detergent Metering Valve** locks out air and dispenses precise amount of cleaning agent.

■ Four quick-couple **Nozzles** are made of hardened stainless steel and mounted for ready access.

■ Industrial grade overload protected **Control Switches** provide years of reliable performance.

■ **Consolidated Plumbing** means both the water supply inlet and the quick-couple, high-pressure outlet are next to each other for ease of installation.

■ Rust-free, polyethylene **Float Tank** with stainless steel inlet filter and low-turbulence float valve allows for high-pressure application of detergent.

■ Many **Safety Features**, including automatic time-delay shutdown, rupture disk and thermal pump protector to prevent the buildup of excessive pressures or heat.

■ Industrial-duty **Electric Motor** with multiple voltage options and thermal overload protection.

■ **Electronic Ignition** comes standard eliminating the hassle of having to constantly light the pilot flame.


■ Top-of-the-line **Tuff-Skin Hose** has 24-inch hose guard for burst protection and seven times the abrasion resistance as other high-pressure hoses; rated up to 6000 PSI

## WHY CHOOSE THE VNG?

The VNG is the industry standard for natural gas heated hot water pressure washers. Housed in an attractive, but sturdy, metal cabinet with quick access control panel and industrial-duty components throughout, the VNG is flexible enough to support up to four optional remote wash stations. It is especially known for:

**QUALITY and SAFETY:** The VNG is loaded with quality and safety features. Besides being certified to the rigid UL-1776 safety standards, the VNG is manufactured in a state-of-the-art plant certified to ISO-9001 quality manufacturing procedures. Standard features, not often found on other brands, include time delay shutdown, electronic ignition, steam combination, stainless steel variable pressure wand, and pressure gauge.

**EFFICIENCY:** The VNG's super-efficient burner has an energy-efficient, vertical, Schedule 80 heating coil.

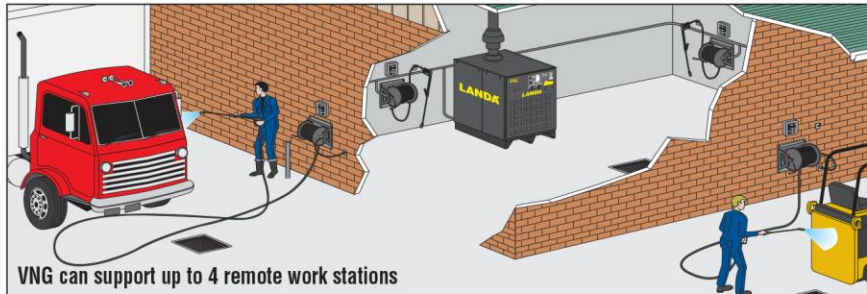

Model #	Part #	GPM	PSI	Pump RPM	Motor HP	Volts	Phase	Amps	Approx BTUs	Ship Wt (lbs)
VNG4-20024A	1.109-563.0	4.0	2000	930	6.2	230	1	27	400,000	1010
VNG4-20024B	1.109-564.0	4.0	2000	930	6.2	230	3	15	400,000	990
VNG4-20024C	1.109-565.0	4.0	2000	930	6.2	460	3	8	400,000	990
VNG4-20024H	1.109-568.0	4.0	2000	930	6.2	208	3	18	400,000	1000
VNG4-30024A	1.109-569.0	3.9	3000	775	8.2	230	1	36	400,000	1030
VNG4-30024B	1.109-570.0	3.9	3000	775	8.2	230	3	25	400,000	1030
VNG4-30024C	1.109-571.0	3.9	3000	775	8.2	460	3	15	400,000	1030
VNG4-30024H	1.109-574.0	3.9	3000	775	8.2	208	3	27	400,000	1010
VNG6-30024B	1.109-575.0	6.0	3000	1525	15.0	230	3	39	600,000	1830
VNG6-30024C	1.109-576.0	6.0	3000	1525	15.0	460	3	19	600,000	1830
VNG8-30024B	1.109-579.0	8.0	3000	1370	20.0	230	3	52	750,000	1845
VNG8-30024C	1.109-580.0	8.0	3000	1370	20.0	460	3	26	750,000	1845
VNG8-30024H	1.109-582.0	8.0	3000	1370	20.0	208	3	54	750,000	1845
VNG10-20024B	1.109-559.0	10.0	2000	1630	20.0	230	3	46	935,000	1925
VNG10-20024C	1.109-560.0	10.0	2000	1630	20.0	460	3	23	935,000	1925

### Field Installed Options & Accessories

#### Remote Stations

- 8.903-465.0 Remote Station for Time Delay Unit ♦
- 8.903-464.0 Remote Station for Auto Start/Stop Unit ♦

**VNG can support up to 3 additional stations.**

- 8.905-686.0 Additional Control Box for Time Delay Unit ♦
- 8.905-688.0 Additional Control Box for Auto Start/Stop Unit ♦

#### LanCom Wireless Remote

- 8.930-376.0 LanCom Wireless Remote Control System ♦
- 8.941-545.0 Additional LanCom Remote
- 8.930-131.0 Wall Mount Bracket for Fixed LanCom Remote

#### LP-Gas Conversion Kits

- 9.801-019.0 LP Conversion Kit (for models up to 4 GPM) ♦
- 8.904-068.0 LP Conversion Kit (for models over 4 GPM) ♦
- 9.802-633.0 LP Regulator Assembly

#### Other Options

- 8.903-512.0 Auto Start/Stop (for models up to 6 GPM) [Replaces Time Delay Feature] ♦
- 8.903-513.0 Auto Start/Stop (for 8 GPM model) [Replaces Time Delay Feature] ♦
- 9.801-040.0 Draft Diverter, 10" (for models up to 4 GPM)
- 8.717-730.0 Draft Diverter, 12" (for models over 4 GPM)

♦ Factory Installed

Distributed by:



**Kepner Equipment Inc.**  
2365 Firehall Rd.  
Canandaigua, NY 14424  
Phone: (585) 396-1960  
Toll Free: (888) 895-2632  
Fax: (585) 394-2999  
www.KepnerEquipment.com